

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number  
**WO 2004/059685 A1**

(51) International Patent Classification<sup>7</sup>: **H01J 17/49**

(21) International Application Number:  
PCT/KR2003/002835

(22) International Filing Date:  
24 December 2003 (24.12.2003)

(25) Filing Language: Korean

(26) Publication Language: English

(30) Priority Data:  
10-2002-0085171  
27 December 2002 (27.12.2002) KR

(71) Applicant (for all designated States except US): **ORION  
ELECTRIC CO., LTD.** [KR/KR]; 257 Gongdan-dong,  
Gumi-si, Gyoungsangbuk-do 730-030 (KR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MOON, Gwon**

Jin [KR/KR]; Ga-706 Neulpreun Apt., Inpyung-ri, Buk-  
sam-myeon, Chilgok-gun, Gyoungsangbuk-do 718-844  
(KR). **CHOI, Gwang Pyo** [KR/KR]; #112-1505 Woobang  
Sincheonji, Seokjeok-myeon, Chilgok-gun, Gyoungsang-  
buk-do 718-830 (KR). **MOON, Seok Joon** [KR/KR]; 257  
Gongdan-dong, Gumi-si, Gyoungsangbuk-do 730-904  
(KR). **JANG, Hea Sung** [KR/KR]; 623-18 Sinarm 4-dong,  
Dong-gu, Daegu 701-821 (KR).


(74) Agent: **HWANG, Eui In**; 10th Floor, Hankook Tire Bldg.,  
647-15 Yoksam-dong, Gangnam-gu, Seoul 135-723 (KR).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO,  
CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB,  
GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG,  
KP, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,  
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,  
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: MULTI-TYPED PLASMA DISPLAY PANEL

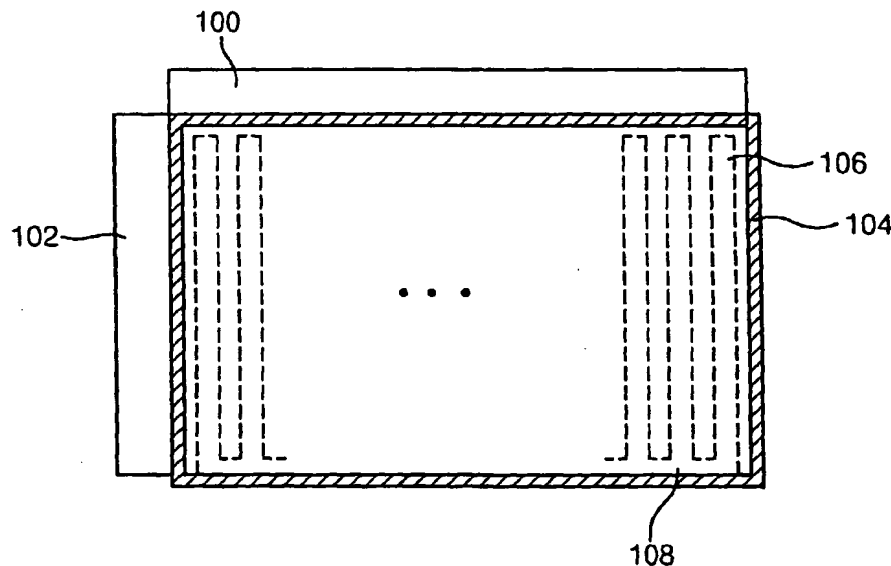

(57) Abstract: Disclosed is a multi-typed plasma display panel for preventing internal penetration of a seal line by forming a barrier rib in a vertical direction, in a horizontal direction or in both directions. In the multi-typed plasma display panel, a barrier rib is formed according to a cross-section in a vertical direction, in a horizontal direction or in both directions so that a seal line of the cross-section is prevented from being penetrated internally. In the horizontal direction, an auxiliary barrier rib may be further formed outside the barrier rib. Additionally, a dielectric of the rear panel is removed as large as an area separated from the cross-section in a predetermined distance so that the seal line may be formed in a condition where a glass is exposed.



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

## MULTI-TYPED PLASMA DISPLAY PANEL

### [Technical Field]

The present invention relates to a multi-typed plasma display panel, and more particularly, to a multi-typed plasma display panel for preventing internal penetration of a seal line by forming barrier ribs in a horizontal direction, in a vertical direction or in both directions.

### [Background Art]

A large screen display device, as shown in Fig. 1, can be formed by assembling unit plasma display panels A, B, C and D. The unit plasma panel used in manufacturing a large screen is called a multi-typed plasma display panel.

When a multi-typed plasma display panel is assembled as described above, a seam area is formed on adjacent sides of each panel. The seam area includes a seal line for sealing sides of the multi-typed plasma display panel.

The multi-typed plasma display panel is manufactured by cutting a rear substrate 10 of Fig. 2 and a front substrate 20 of Fig. 3 in a predetermined size, arranging the rear substrate 10 and the front substrate 20 and coating a seal line 26 and then combining the rear substrate 10 and the front substrate 20.

In particular, a plurality of barrier ribs 12 and a plurality of address electrodes 14 are formed alternately in the rear substrate 10 in a vertical direction, and a plurality of electrodes 22 (electrodes X and Y) are formed horizontally in the front substrate 20.

In order to combine the rear substrate 10 and the front substrate 20, each substrate is cut according to a predetermined vertical cut line H and a horizontal cut line I. The vertical cut line H and the horizontal cut line I are defined in a certain area at the side of a display area.

After the rear substrate 10 and the front substrate 20 are cut, they are arranged up and down as shown in Fig. 4, where the seal line is coated, and the rear substrate 10 and the front substrate 20 are sealed and exhausted.

In a conventional multi-typed plasma display panel of Fig. 4, the penetration of the seal line 26 is generated in a portion cut by the horizontal cut line I like the area E1, as shown in Fig. 5, due to a gap formed by the barrier rib 12.

As shown in said Fig. 5, if the seal line penetrates into the vertical cross-section, the penetration not only causes contamination of the side light emitting area of the multi-typed plasma display panel but also enlarges the seam area.

Moreover, in the cross-section cut by the horizontal cut line H as the E2 area of Fig. 4, the seal line 26 is coated on the top of the barrier rib 12 located in the most outside barrier rib, as shown in Fig. 6, which results in enlargement of a vertical gap of the panel, thereby generating mis-discharge at operation. Furthermore, in the Fig. 6, the seal line 26 also penetrates into a discharge cell, which causes contamination of the light emitting area and enlarges the seam area.

In addition, in the conventional multi-typed plasma display panel, outgasing is generated by the unstable sealing operation, thereby degrading reliability and durability of the product.

#### **[Detailed Description of the Invention]**

Accordingly, it is an object of the present invention to provide a multi-typed plasma display panel for preventing internal penetration of a side seal line by forming barrier rib in a vertical direction, in a horizontal direction or in both directions.

It is another object of the present invention to provide a multi-typed plasma display panel having a reinforced adhesive force of a cross-section, thereby improving reliability and durability of the product.

In the multi-typed plasma display panel according to an embodiment of the present invention, barrier ribs are formed along the cross section in a horizontal direction, in a vertical direction or in both directions in order to prevent internal penetration of a seal line.

5           Moreover, in accordance with an embodiment of the present invention, an auxiliary barrier rib may be further formed in the outside of the barrier in a vertical direction.

          Furthermore, a dielectric surface of the rear substrate is removed as much as an area separated at a certain distance from the cross-section, where a seal line is formed in a  
10   glass exposure condition.

**[Brief Description of the Drawings]**

          Fig. 1 is a diagram of a large screen display device formed by assembling conventional multi-typed plasma display panels.

          Fig. 2 is a plane diagram of a rear substrate for manufacturing a multi-typed  
15   plasma display panel.

          Fig. 3 is a plane diagram of a front substrate for manufacturing a multi-typed plasma display panel.

          Fig. 4 is a plane diagram of a conventional multi-typed plasma display panel.

          Fig. 5 is a diagram illustrating sealant penetration in an E1 area of Fig. 4.

20           Fig. 6 is a diagram illustrating sealant penetration in an E2 area of Fig. 4.

          Fig. 7 is a plane diagram of the first embodiment of a multi-typed plasma display panel according to the present invention.

          Fig. 8 is a plane diagram illustrating a second embodiment of a multi-typed plasma display panel according to the present invention.

25           Fig. 9 is a plane diagram illustrating a third embodiment of a multi-typed plasma display panel according to the present invention.

Fig. 10 is a plane diagram illustrating a fourth embodiment of a multi-typed plasma display panel according to the present invention.

Fig. 11 is a plane diagram illustrating a fifth embodiment of a multi-typed plasma display panel according to the present invention.

5 Fig. 12 is a plane diagram illustrating a sixth embodiment of a multi-typed plasma display panel according to the present invention.

**[Preferred Embodiments of the Invention]**

The present invention discloses embodiments of a multi-typed plasma display panel wherein a barrier rib is applied to a vertical cross-section, a horizontal cross-section  
10 or both. The illustration of electrodes (an electrode X, an electrode Y, and an address electrode) in the embodiments is omitted to simplify the explanation.

First, embodiments wherein a horizontal barrier rib is formed are described.

Referring to Fig. 7, in the first embodiment, a rear substrate 100 and a front substrate 102 are adhered by a seal line 104, and a vertical barrier rib 106 and a horizontal  
15 barrier rib 108 are formed on the rear substrate 100.

In a horizontal direction a plurality of barrier ribs 106 are formed on the whole surface of the rear substrate 100, and each barrier rib 106 is lined alternately in parallel with an address electrode (not shown). Furthermore, the horizontal barrier rib 108 which  
20 is extended to the edge of the barrier rib 106 is located at a side contacting the vertical cross-section.

In this regard, the barrier rib 108 and the barrier rib 106 are formed in lines perpendicular to each other.

As described in the above, in the first embodiment, the barrier rib 108 in the horizontal direction intercepts penetration of the seal line into the horizontal cross-section  
25 of the multi-typed plasma display panel, thereby preventing the seal line from

contaminating a light emitting area and a seam area from being enlarged.

Moreover, as shown in Fig. 8, in the second embodiment, a multi-typed plasma display panel may further comprise an auxiliary barrier rib 110 formed in parallel with the barrier rib 108.

5           The barrier rib 108 and the auxiliary barrier rib 110 may be separated at the same distance with the separation width of the barrier ribs 106 of the display area or differently designed. The width of the barrier rib 108 and the auxiliary barrier rib 110 may also be configured to have the same or different width with that of the barrier ribs 106 in the display area.

10           Therefore, in the second embodiment of Fig. 8 the, auxiliary barrier rib 110 may tightly block penetration of seal line 104 into the light emitting area.

Hereinafter, embodiments wherein a vertical barrier rib is formed are described.

As shown in Fig. 9 and 10, barrier ribs 106b and 106d may be formed outside the most outside of barrier ribs 106a and 106c that are adjacent to the vertical cross-section of  
15   the multi-typed plasma display panel. The third embodiment shown in Fig. 9 illustrates a narrow space between the most outside barrier ribs 106a and 106b where the bottom is not fully opened. The fourth embodiment of Fig. 10 illustrates where the bottom between the most outside barrier ribs 106c and 106d is fully opened.

In the third and fourth embodiment, the barrier ribs 106b and 106d intercept  
20   internal penetration of the seal line 104 on the side.

Therefore, contamination of the light emitting area in the horizontal cross-section of the multi-typed plasma display panel and enlargement of the seam area are prevented.

Meanwhile, the fifth and the sixth embodiment shown in Figs. 11 and 12 may be provided in order to strengthen an adhesive force of the rear substrate 100 and the front  
25   substrate 102.

In the fifth embodiment, a space 114 between most outside barrier ribs 106e and 106f formed in the third and fourth embodiments is filled with sealant. In this case, the rear substrate 100 and the front substrate 102 may be solidly combined by the adhesive force of the sealant filled in the space 114.

5        Moreover, in the sixth embodiment of Fig. 12, a dielectric surface 112 formed on top of the rear substrate 100 is formed to the area separated in a predetermined distance from the cross-section. Here, the detailed illustration of the dielectric 112 is omitted for simplicity of description in the first to the fifth embodiments.

10        In the above-described sixth embodiment, the seal line 104 contacts the rear substrate 100 as much as the dielectric surface 112 is removed. That is, the dielectric surface 112 is removed, and when a glass surface of the rear substrate 100 is exposed, the seal line 104 is formed.

15        The sealant composing the seal line 104 is more cohesive to the glass composing the rear substrate 100 than the dielectric surface 112. In this regard, the adhesive force between the rear substrate 100 and the front substrate 102 is strengthened as much as the dielectric surface 112 of the rear substrate 100 is removed.

#### **[Industrial Applicability]**

20        In this regard, according to the embodiments of the present invention, vertical and horizontal cross-sections of the multi-typed plasma display panel may prevent seal line from contaminating a light emitting area and a seam area from being enlarged.

      Furthermore, reinforcing the adhesive force between rear and front substrates elevates confidentiality corresponding to outgasing, thereby improving the reliability and durability of the product.



**[What is claimed is]**

1. A multi-typed plasma display panel comprising at least one or more sides of a cross-section,

5 wherein a barrier rib is formed along the cross-section in order to prevent penetration through a seal line of the cross-section.

2. The panel according to claim 1, wherein the barrier rib is extended to the edge of barrier ribs formed vertically in a rear substrate and formed perpendicular to the edge.

10

3. The panel according to claim 2, wherein an auxiliary barrier rib is further formed between the barrier rib and the cross-section and separated from the barrier rib in parallel.

4. The panel according to claim 1, wherein the barrier rib is formed between the most outside barrier rib which is adjacent to said cross-section of the rear substrate and the cross-section.

15

5. The panel according to claim 4, wherein a sealant is filled in a space between the barrier rib and the most outside barrier rib.

20

6. The panel according to claim 4, wherein a dielectric surface of the rear substrate is removed as much as an area separated at a predetermined distance from the cross-section, where a seal line is formed in a glass exposure condition.

25

7. The panel according to claim 6, wherein the removal of the dielectric surface of

the rear substrate is performed on the area between the barrier rib and the cross-section.

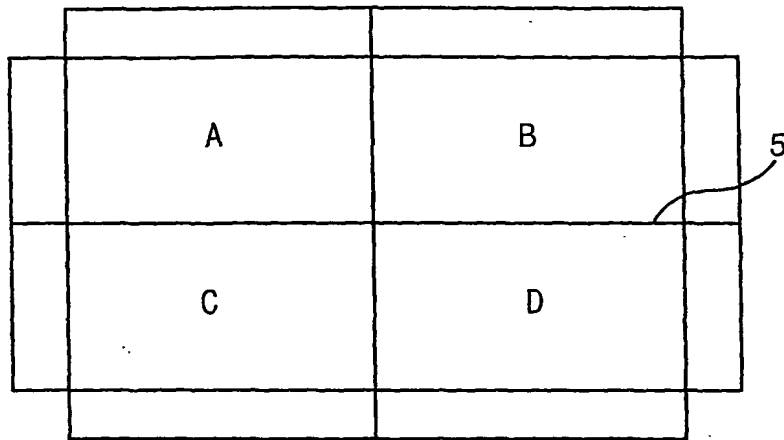


Fig.1

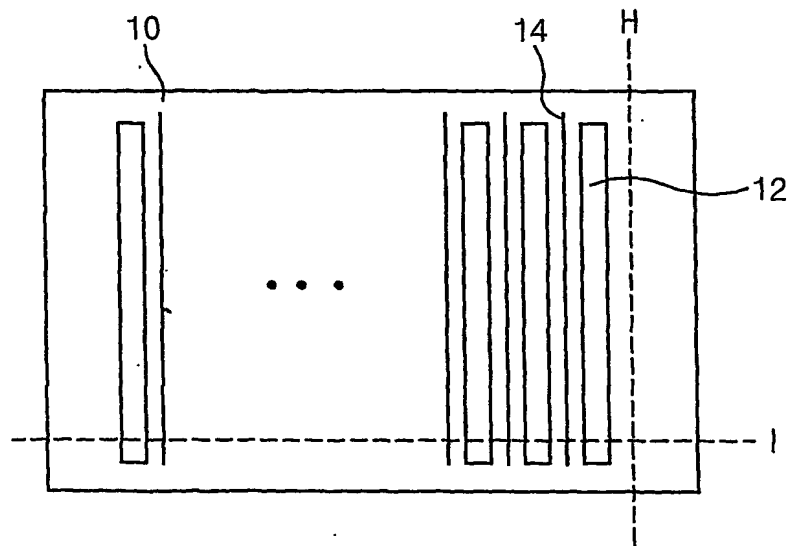


Fig.2

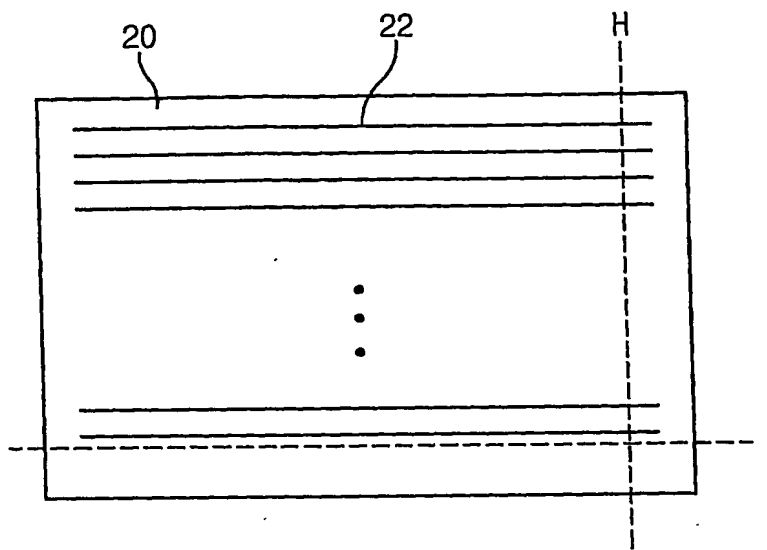


Fig.3

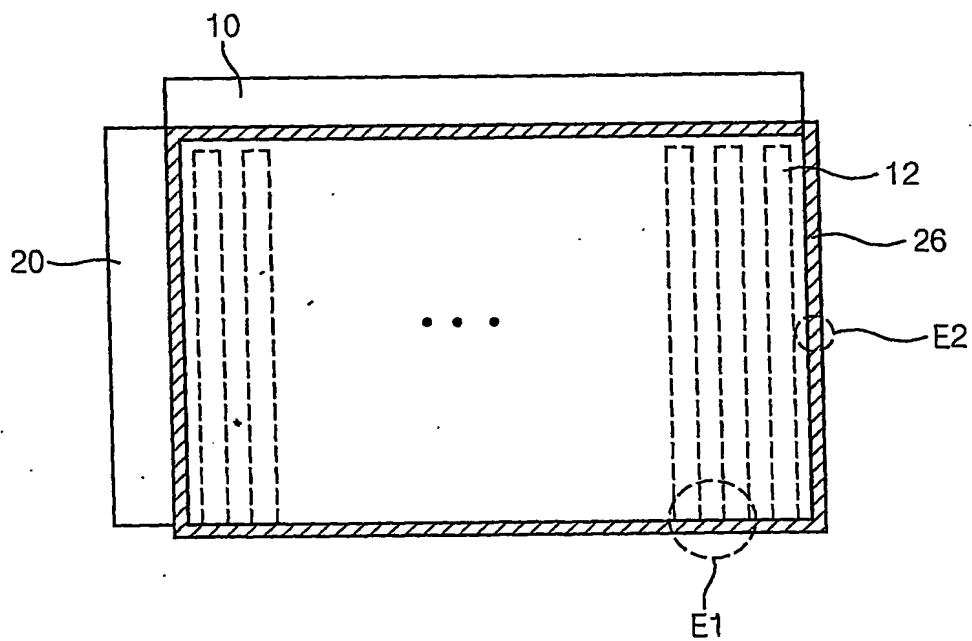


Fig.4

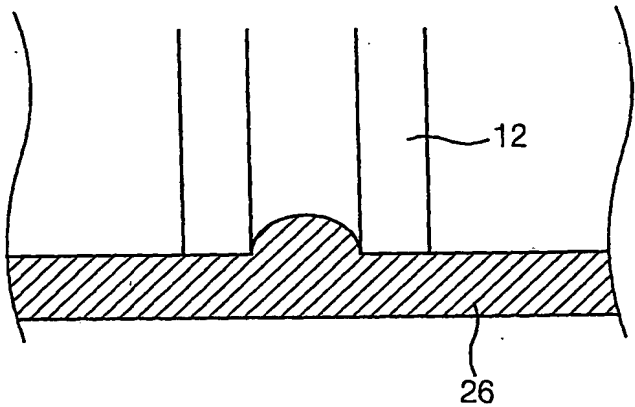


Fig.5

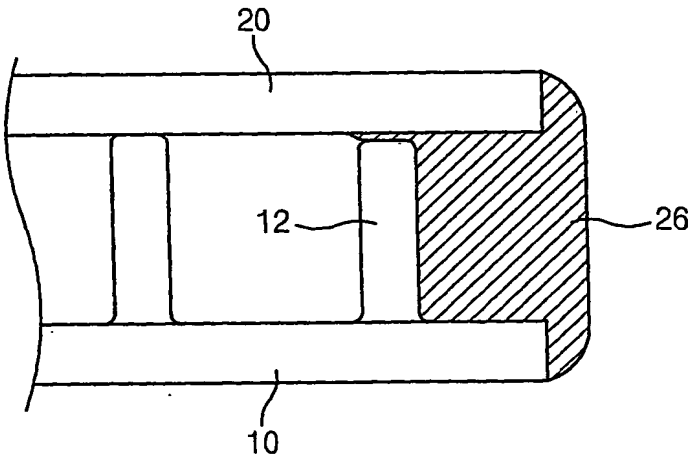


Fig.6

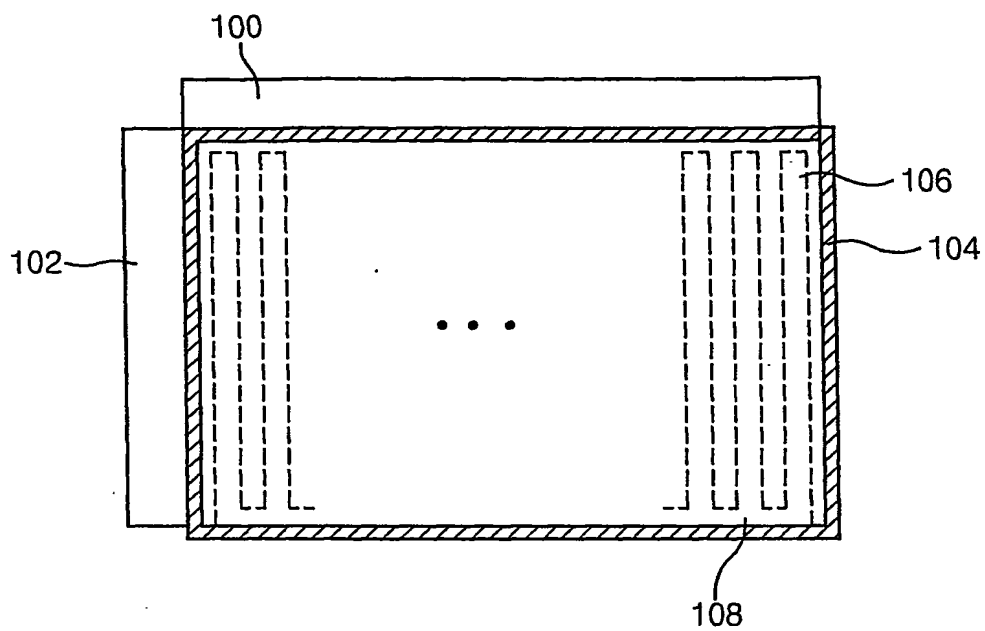


Fig. 7

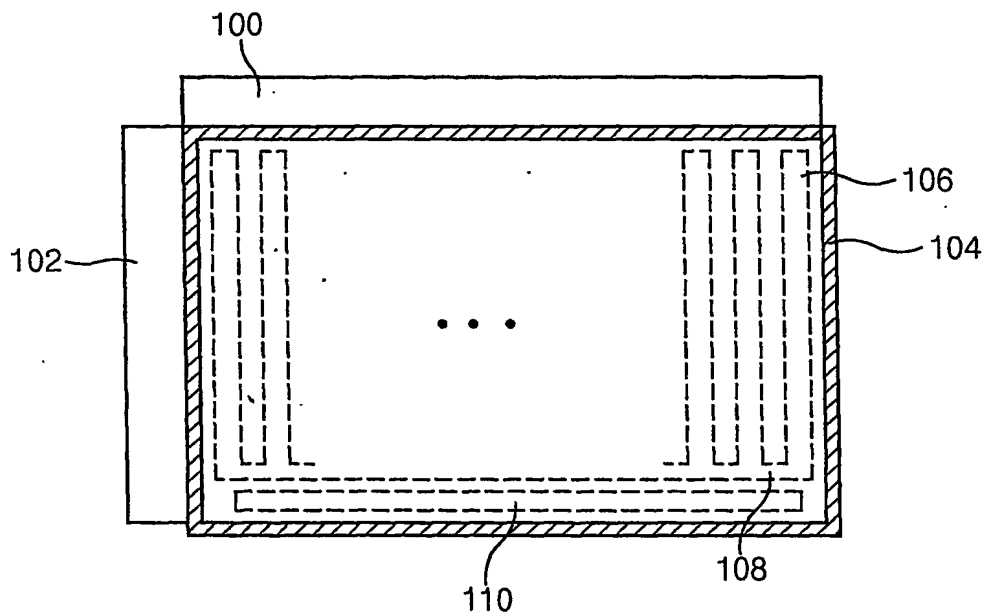


Fig. 8

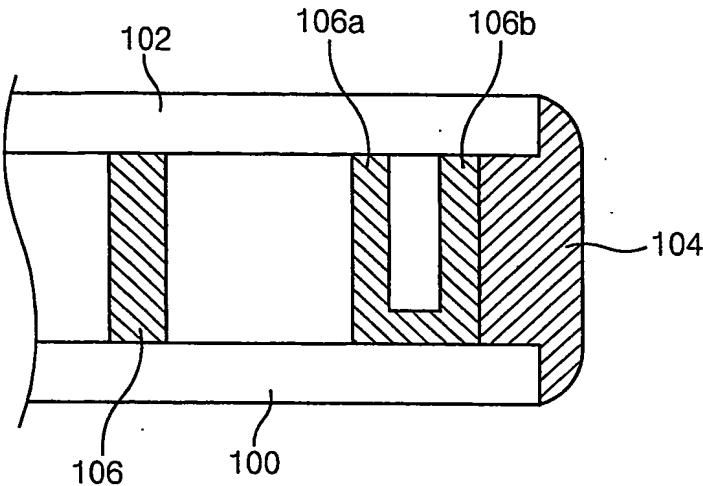


Fig.9

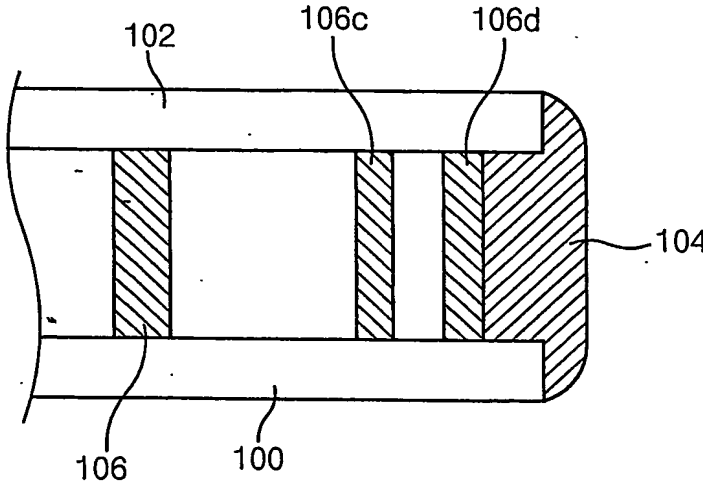


Fig.10

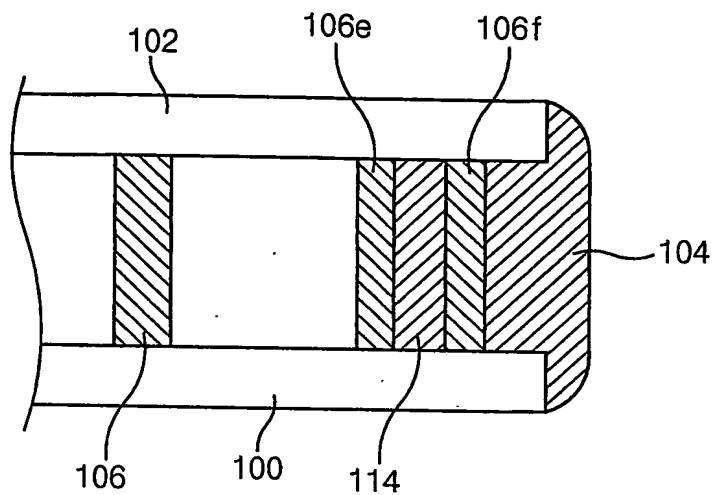


Fig.11

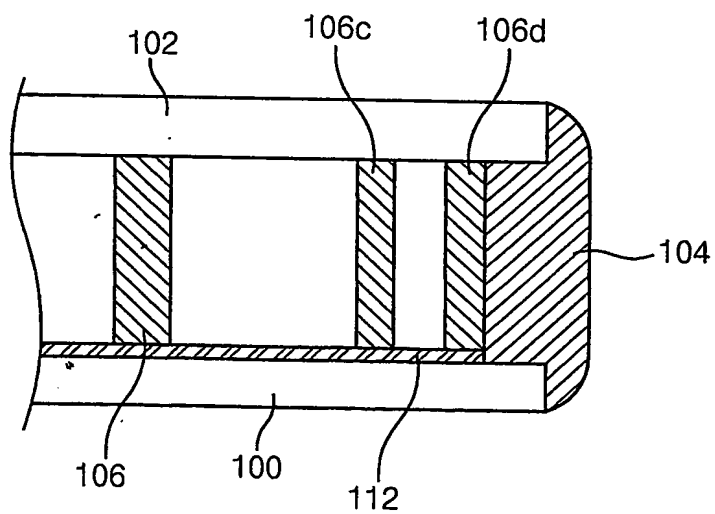


Fig.12



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/KR2003/002835

**A. CLASSIFICATION OF SUBJECT MATTER****IPC7 H01J 17/49**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 : H01J, G09G, G09F, G08B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	KR 95-24133 A (ORION CORP) 21 AUGUST 1995 See claim 1,5	1,2
Y	KR 00-44624 A (HUNDAI CORP) 15 JULY 2000 Fig 3, page 2 line 38~41	1,2
T	JP 15-100213 A (DAINIPPON PRINTING COLTD) 04 APRIL 2003 See the whole document	1,2
A	JP 12-106093 A (MITSUBISHIELECTRIC CORP) 11 APRIL 2000 See the whole document	1
A	KR 01-82878 A (SAMSUNG SDI CORP) 31 AUGUST 2001 See claim 1	1
A	JP 10-207402 A (FUJITSUGENERAL LTD) 07 AUGUST 1998 See the whole document	1
A	JP 09-223276 A (FUJITSUGENERAL LTD) 26 AUGUST 1997 See the whole document	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

24 FEBRUARY 2004 (24.02.2004)

Date of mailing of the international search report

25 FEBRUARY 2004 (25.02.2004)

Name and mailing address of the ISA/KR



Korean Intellectual Property Office  
920 Dunsan-dong, Seo-gu, Daejeon 302-701,  
Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KANG, Byung Sub

Telephone No. 82-42-481-5965



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

PCT/KR2003/002835

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
KR 95-24133	A	21-08-95	NONE	
KR 00-44624	A	15-07-00	NONE	
JP 15-100213	A	04-04-03	NONE	
JP 12-106093	A	11-04-00	TW 442818 B KR 2000022589 A CN 1249526 A JP 3442294 B2 US 6528944 BA Ep 991098 A2	23-06-01 25-04-00 05-04-00 02-09-03 04-03-03 05-04-00
KR 01-82878	A	31-08-01	NONE	
JP 10-207402	A	07-08-98	NONE	
JP 09-223276	A	26-08-97	NONE	